

LifeSmart®

Simply Brilliant

Smart Light Switch User Guide V1.0

Setting up your LifeSmart Smart Light Switch

Model. LS123/LS124/LS125

PRODUCT INTRODUCTION

The LifeSmart Smart Light Switch replaces your ordinary switch with smart home technology to make your life easier. With the help of LifeSmart Smart Station and the free LifeSmart App, you will gain infinite control possibilities.

Forget to turn off the lighting when you leave home? Want to turn on the air conditioner or the heater before arriving home? No Problem! All the LifeSmart devices, or other ordinary devices connecting to the LifeSmart Smart Switches can be controlled intelligently.

PRODUCT INTRODUCTION

The best part is that all the devices can be controlled through LifeSmart App anywhere and anytime. Integrated with RGB LEDs, Smart Light Switches are capable of providing over 16 million colors with adjustable brightness. Let the lights adjust to your needs, not the other way around. Get yourself ready to experience the smart home!

Disposal And Recycling Information

This symbol indicates that this product and/or battery should not be disposed of with household waste. When you decide to dispose of this product and/or its battery, do so in accordance with local environmental laws and guidelines.



IN YOUR PACKAGE

Smart Light Switch 1 User Guide 1 Screw 2


SPECIFICATIONS

Size	120*72*35mm
Weight	110g
Wireless Distance	200m (open field)
Wireless Protocol	CoSS
Static Power Consumption	Max 1.5W
Working Voltage	AC 100~240V 50/60Hz
Loads	Resistive Load: < 500W per channel Inductive/Capacitive Load: < 200W per channel

Regulatory Certification



SMART LIGHT SWITCH

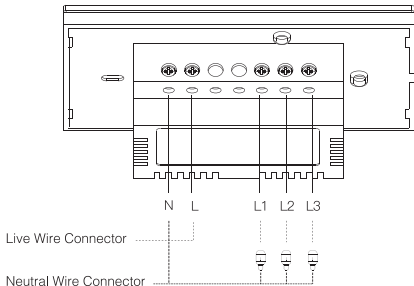

N : Switch-in Neutral Wire Connector

L : Switch-in Live Wire Connector

L1: Switch-out Live Wire 1

L2: Switch-out Live Wire 2

L3: Switch-out Live Wire 3

INSTALLATION STEPS

- ① Cut off the power and ensure that there is no electricity leakage before the installation.
- ② Take out the switch, stretch the panel edge to separate the switch and the panel.
- ③ Connect the wires by following the diagram above. We strongly advise to put insulating tape over the screws that fix the wires. Please ensure that the N line and L line are not crossed. Please ensure that the screws and the metal box are not contacted.

INSTALLATION STEPS

- ④ Please put all the wires neatly back to the switch box. Fix the switch with two screws.
- ⑤ Close the panel and clip it properly. The mal-installation may harm the switch connection.
- ⑥ Turn on the power, check if the indicator light is on or not and test. If the indicator light is not on, please check the L and N line. if there is no response to the touch, please re-start the power supply and try again.

APP SETUP

The device requires a LifeSmart Smart Station and the LifeSmart App to operate. Please download the App and set up your Smart Station before proceeding. The App is available by scanning the following QR Code, or go to the Google Play Store or iOS App Store directly.

▶ Method 1

▶ Method 2

www.ilifesmart.com/getapp.html



LifeSmart App is required for operating with this device.

Minimum operating system requirements iOS 7.0 or Android 4.0.

SET UP

LifeSmart's Smart Light Switch needs to be paired with Smart Station to join the smart system.

- ① After configuration of the Smart Station, choose "Add Device" in LifeSmart App, select "**Smart Light Switch**", enter pairing mode.
- ② Follow the instruction on the app to finish pairing.
- ③ If a time-out error occurs, please repeat step 1-3 until it's successfully paired.
- ④ Smart Light Switch has features such as timer turn on/off and interaction with other smart devices. Please follow the instructions on the app to discover.

WARRANTY DESCRIPTION

Thank you for purchasing LifeSmart products. In order to protect your rights, please read the following content carefully: The warranty period of our company's products is one year from the date of purchase. Or longer if local laws impose a longer minimum term, in which case the minimum term is the warranty period. During the warranty period, any faults caused by the product itself or for quality problems that arise under normal usage, LifeSmart will provide a free replacement.

ATTENTION

The following conditions are not covered by the warranty:

- Product failure or damage caused by installation, use, and maintenance that is not in accordance with the product instructions;
- Products beyond the warranty period;
- Products that have the barcode tampered with or removed;
- Devices that have been tampered with or customized outside of LifeSmart Terms Of Service as on the LifeSmart App and website;
- User-caused damage, such as inappropriate voltage input, high temperature, accidental spillage, physical damage, etc;
- Product failure or damage caused by force majeure such as earthquakes, fires, or floods;
- Product failure or damage caused by other problems except the product itself.

DECLARATION

LifeSmart is a trademark of Hangzhou LifeSmart Technology Co., Ltd. As for the trademarks, product logos and product names from other companies presented within this manual, they are possessed by their own right holders.

Without our written permission, no entity or individual shall extract, copy or disseminate in part or the whole of the manual contents in any form. Due to product version upgrades or other reasons, content of this manual may change. Our company reserves the right to change the contents of this manual without any notice. This manual is used only for instructional purposes. We strive to provide accurate information in this manual, but we are not able to ensure that the content of this manual is current.

DECLARATION

Statements, information and advice in this manual do not constitute any expressed or implied assurance. Updated manuals are available on our website at iot.ilifsmart.com or by contacting our Team.

DECLARATION

DECLARATION OF CONFORMITY

Hereby, LifeSmart declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://global.ilifsmart.com/ce/docs/>



Notice: This device may be used in each member state in EU.

DECLARATION

WEEE Directive Compliance

Device labelled with this symbol should not be disposed with other household wastes. It shall be handed over to the applicable collection point for the recycling of waste electrical and electronic equipment.



Manufacturer: Hangzhou LifeSmart Technology Co., Ltd.

Address: 22th Floor, Yuesheng International Center, 518 Pinglan Road, Xiaoshan District, Hangzhou, Zhejiang, China



